

# Documentation

## TMail – Temporary Multi Domain Email System

By [Harshit Peer](#)

## Requirements

### Server Requirements


- PHP IMAP Extension
- iconv Extension


### Other Requirements

- IMAP Email
- Default Email Forwarder


## Installation and Setup (cPanel)

#1 – Create a new Email Account for catching all Emails

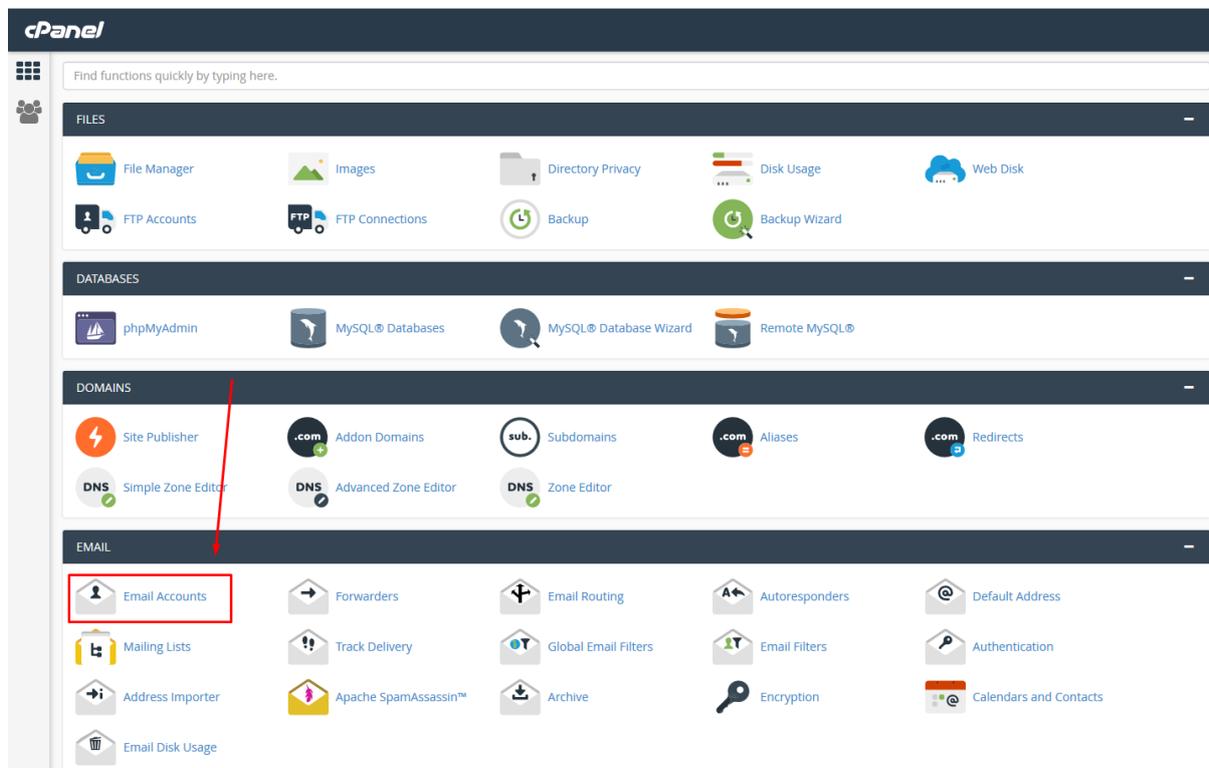

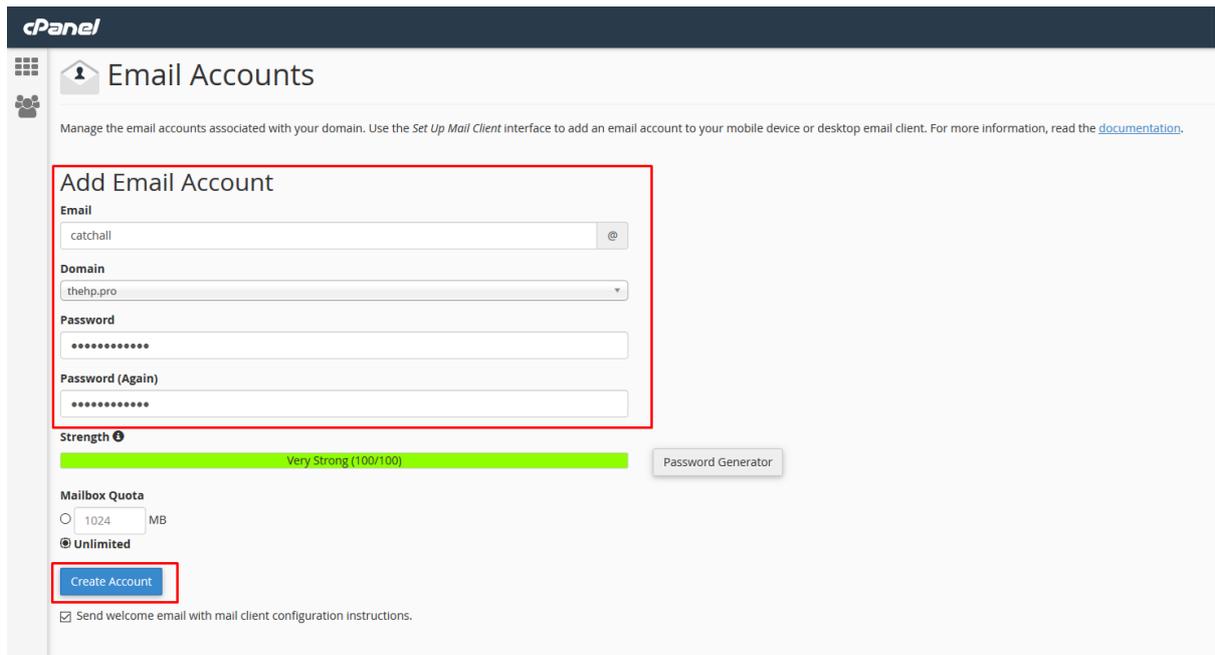

#2 – Forwarding all emails to above created email ID.

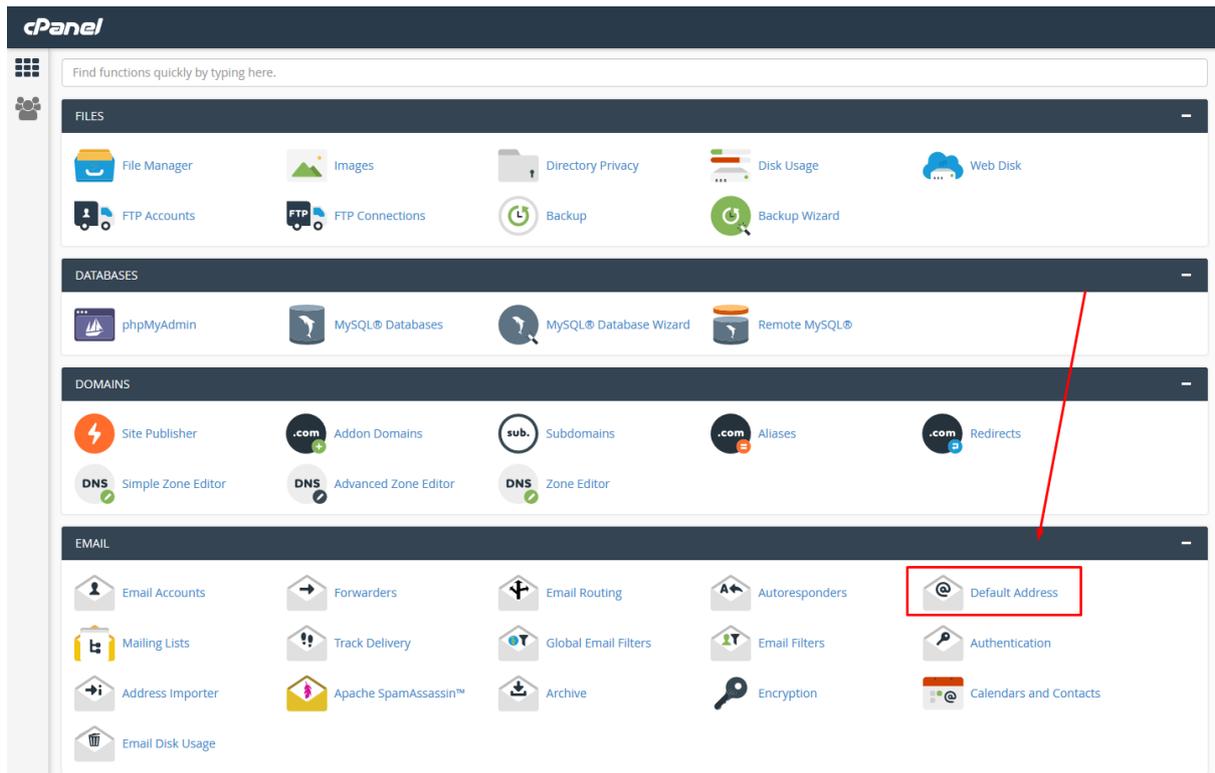

**Default Address**

Catch any email that is sent to an invalid email address for your domain. For more information, read the [documentation](#).

**Managing**

All Domains

**Default Address Maintenance** Select the domain to configure

Send all unrouted email for the following domain:

tmail.thehp.pro

**Current Setting:** all@tmail.thehp.pro

Discard the email while your server processes it by SMTP time with an error message.  
**Failure Message (seen by sender)**  
 No such person at this address.

**Forward to Email Address**  
**Forward to Email Address:**  
 catchall@thehp.pro

**Advanced Options** ▾

[Change](#) Enter the email ID created in #1

Repeat above step for all domains you want to configure under TMail Script.

### #3 – Configure config.php

```
<?php
$config['title'] = "TMail Script";
$config['host'] = "mail.thehp.pro";
$config['user'] = "catchall@thehp.pro";
$config['pass'] = "password";
$config['domains'] = array("tmail1.tk", "tmail2.tk", "tmail3.tk", "tmail4.tk", "tmail5.tk");
?>
```

**\$config['title']** - Enter the site title in first option

**\$config['domains']** - Enter hostname provided by your Email / Hosting Provider

**\$config['user']** - Enter email ID you created in #1

**\$config['pass']** - Enter password you use to create the above email ID in #1

**\$config['domains']** - Enter the domains separated by comma (,) under double quotes